


## CLAIMS

1. (Original) A wet-developing electrophotographic photoconductor which forms a photosensitive layer containing at least a charge generating agent, an electron transport agent, a hole transport agent and a binding resin on an electrically conductive base body thereof, wherein

an inorganic value/organic value (I/O value) of the electron transport agent is set to 0.60 or more, and an inorganic value/organic value (I/O value) of the binding resin is set to 0.37 or more.

2. (Original) The wet-developing electrophotographic photoconductor according to claim 1, wherein a ratio between the inorganic value/organic value (I/O value) of the electron transport agent and the inorganic value/organic value (I/O value) of the binding resin is set to a value which falls within a range of 1.5 to 3.0.

3. (Currently Amended) The wet-developing electrophotographic photoconductor according to claim 1 or 2, wherein the binding resin contains a polycarbonate resin represented by a following general formula (1).

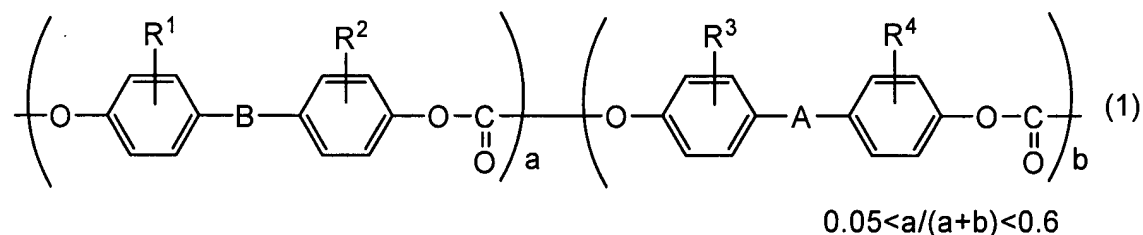

(R<sup>1</sup> to R<sup>4</sup> in the general formula (1) are respectively independent and represent a hydrogen atom, a halogen atom, a substituted or unsubstituted alkyl group having 1 to 20 carbons, a substituted or unsubstituted aryl group having 6 to 30 carbons and a substituted or unsubstituted halogenated alkyl group having 1 to 12 carbons, and A represents -O-, -S-, -

CO-, -COO-, -(CH<sub>2</sub>)<sub>2</sub>-, -SO-, -SO<sub>2</sub>-, -CR<sup>5</sup>R<sup>6</sup>-, -SiR<sup>5</sup>R<sup>6</sup>- or -SiR<sup>5</sup>R<sup>6</sup>-O- (R<sup>5</sup> and R<sup>6</sup> are respectively independent and represent a hydrogen atom, a substituted or unsubstituted alkyl group having 1 to 8 carbons, a substituted or unsubstituted aryl group having 6 to 30 carbons, a trifluoromethyl group, or a cycloalkylidene having 5 to 12 carbons in which R<sup>5</sup> and R<sup>6</sup> form a ring and an alkyl group having 1 to 7 carbons may be included as a substituent group) and B represents single bond, -O- or -CO-.)

4. (Currently Amended) The wet-developing electrophotographic photoconductor according to ~~any one of claims 1 to 3~~, claim 3, wherein R<sup>5</sup> and R<sup>6</sup> in the general formula (1) differ in kinds and R<sup>5</sup> and R<sup>6</sup> possess an asymmetric relationship.

5. (Currently Amended) The wet-developing electrophotographic photoconductor according to ~~any one of claims 1 to 4~~, claim 1, wherein a viscosity average molecular weight of the binding resin assumes a value which falls within a range of 40,000 to 80,000.


6. (Currently Amended) The wet-developing electrophotographic photoconductor according to ~~any one of claims 1 to 5~~, claim 1, wherein a molecular weight of the electron transport agent assumes a value which is equal to or more than 600.

7. (Currently Amended) The wet-developing electrophotographic photoconductor according to ~~any one of claims 1 to 6~~, claim 1, wherein an addition quantity of the electron transport agent assumes a value which falls within a range of 10 to 100 parts by weight with respect to 100 parts by weight of the binding resin.

8. (Currently Amended) The wet-developing electrophotographic photoconductor according to ~~any one of claims 1 to 7~~, claim 1, wherein an addition quantity of the hole transport agent assumes a value which falls within a range of 10 to 80 parts by weight with respect to 100 parts by weight of the binding resin.

9. (Currently Amended) The wet-developing electrophotographic photoconductor according to ~~any one of claims 1 to 8~~, claim 1, wherein a molecular weight of the hole transport agent assumes a value which is equal to or more than 900.

10. (Currently Amended) The wet-developing electrophotographic photoconductor according to ~~any one of claims 1 to 9~~, claim 1, wherein the hole transport agent has the stilbene structure represented by a following general formula (2).

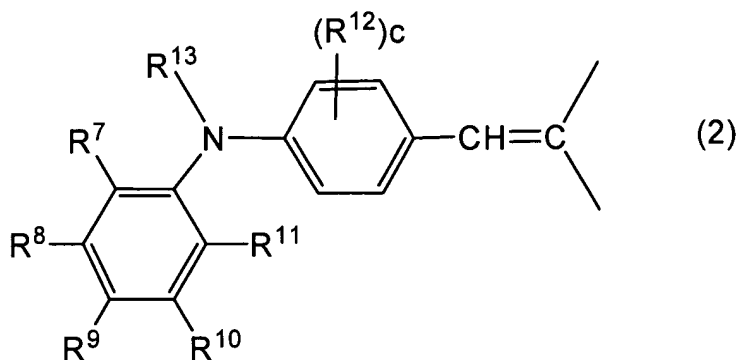

(In the general formula (2),  $R^7$  to  $R^{13}$  are respectively independent, and represent a hydrogen atom, a halogen atom, a substituted or unsubstituted alkyl group having 1 to 20 carbons, a substituted or unsubstituted alkenyl group having 2 to 20 carbons, a substituted or unsubstituted aryl group having 6 to 30 carbons, a substituted or unsubstituted aralkyl group having 6 to 30 carbons, a substituted or unsubstituted azo group, or a substituted or unsubstituted diazo group having 6 to 30 carbons and the repetition number  $c$  is an integer from 1 to 4.)

11. (Currently Amended) The wet-developing electrophotographic photoconductor according to ~~any one of claims 1 to 10~~, claim 1, wherein an elution quantity of the hole transport agent is equal to or below  $5 \times 10^{-7} \text{ g/cm}^3$  when the wet-developing electrophotographic photoconductor is immersed in a hydrocarbon-based solvent used as a wet-developing developer under conditions of a room temperature and 600 hours.

12. (Currently Amended) The wet-developing electrophotographic photoconductor according to ~~any one of claims 1 to 11~~, claim 1, wherein photosensitive layer is a single-layer type.

13. (Currently Amended) ~~The~~ A wet-developing electrophotographic photoconductor which forms a photosensitive layer containing at least a charge generating agent, an electron transport agent, a hole transport agent and a binding resin on an electrically conductive base body thereof, wherein

a molecular weight of the electron transport agent is set to a value equal to or more than 600, and an inorganic value/organic value (I/O value) of the binding resin is set to 0.37 or more.

14. (Currently Amended) A wet-developing image forming device which includes ~~the~~ a wet-developing electrophotographic photoconductor ~~described in any one of claims 1 to 13~~, which forms a photosensitive layer containing at least a charge generating agent, an electron transport agent, a hole transport agent and a binding resin on an electrically conductive base body thereof, wherein an inorganic value/organic value (I/O value) of the electron transport agent is set to 0.60 or more, and an inorganic value/organic value (I/O value) of the binding resin is set to 0.37 or more,

and arranges a charging step, an exposure step, a developing step and a transfer step respectively around the wet-developing electrophotographic photoconductor.